



1. 先连接蓝牙接头到车上的 obd2 诊断接口




2 选择系统设置 system settings

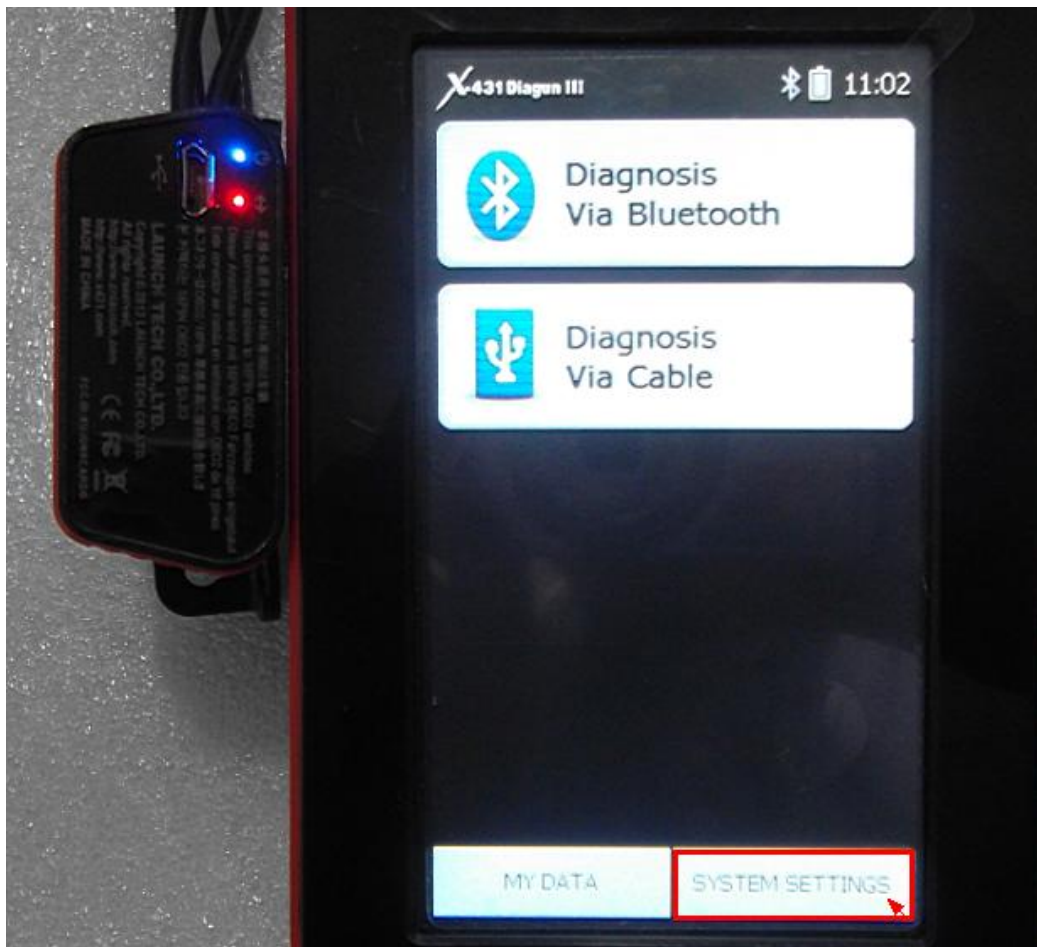


3 选择 set default bluetooth

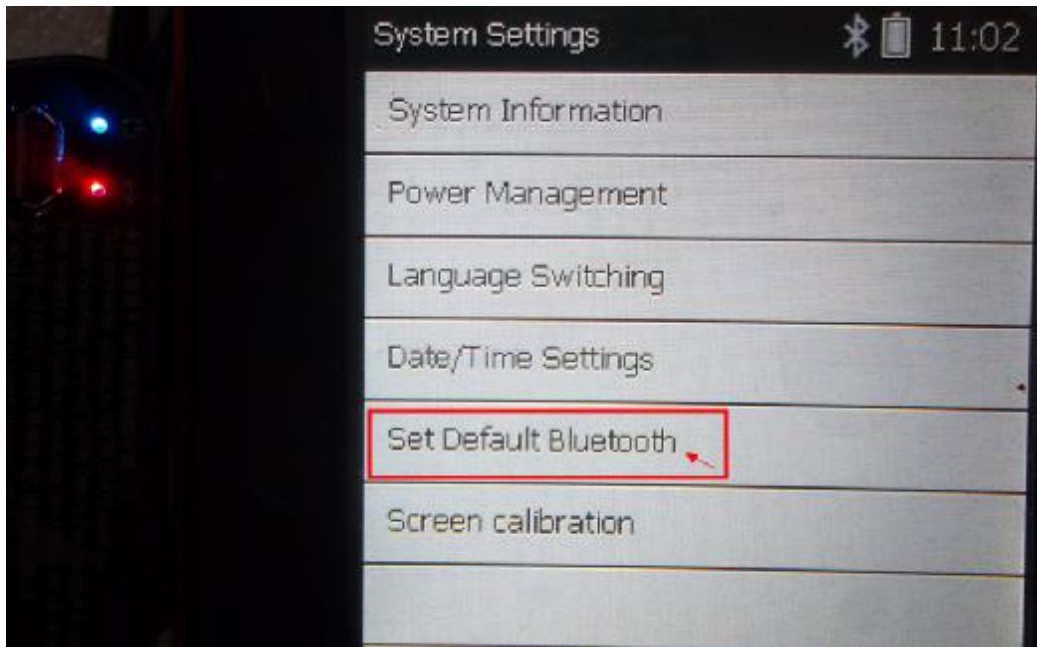


4 蓝牙搜索

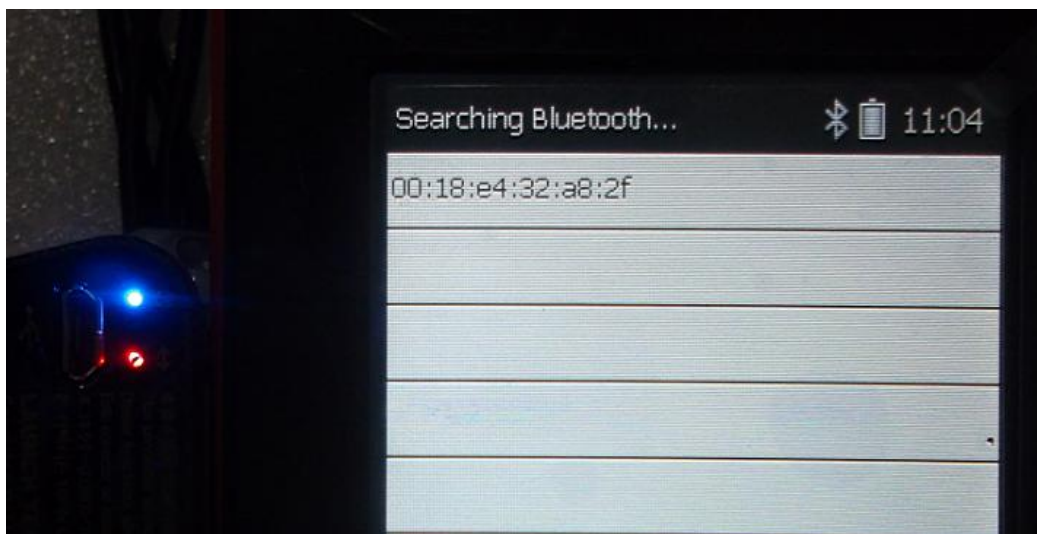


5 搜索成功

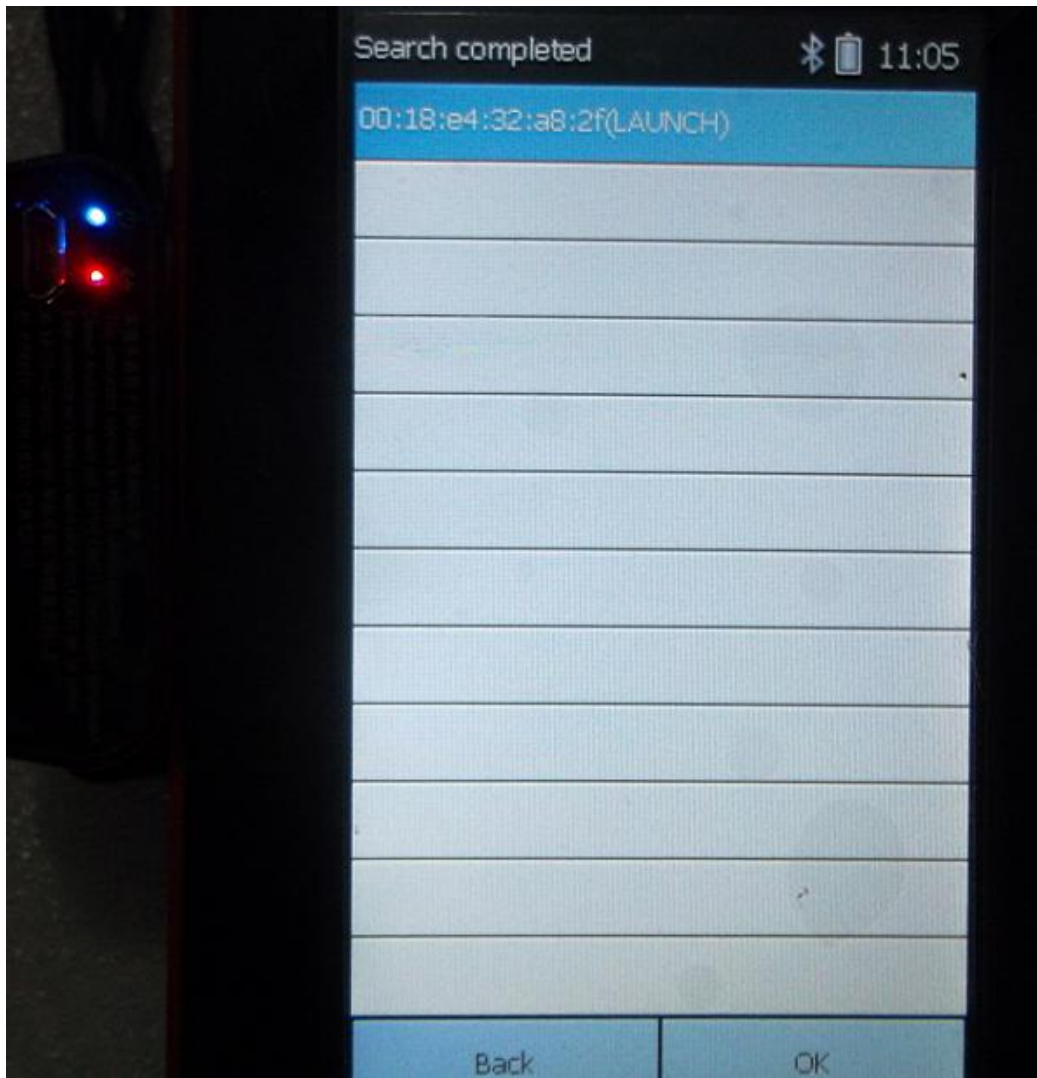


6 成功匹配 并返回桌面

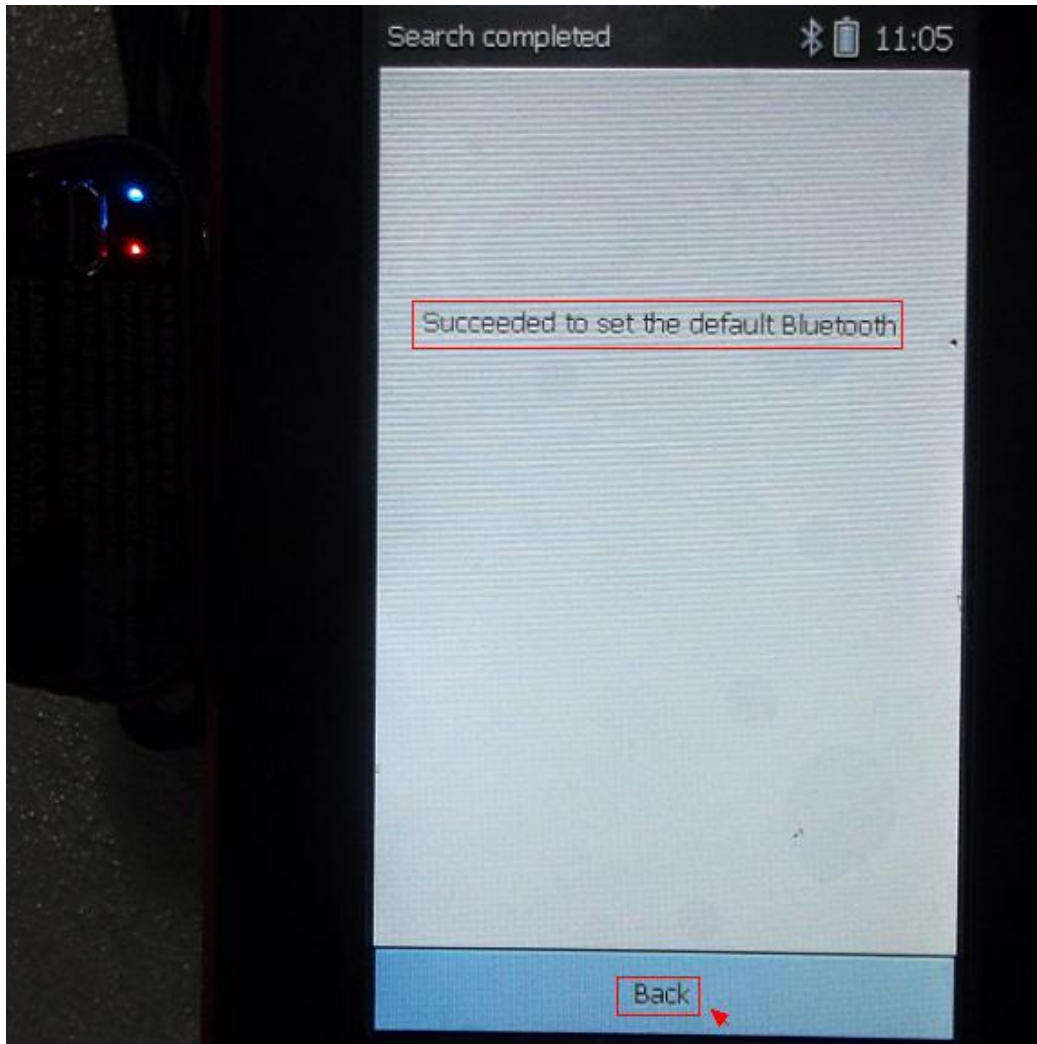


7 选择 diagnosis via bluetooth

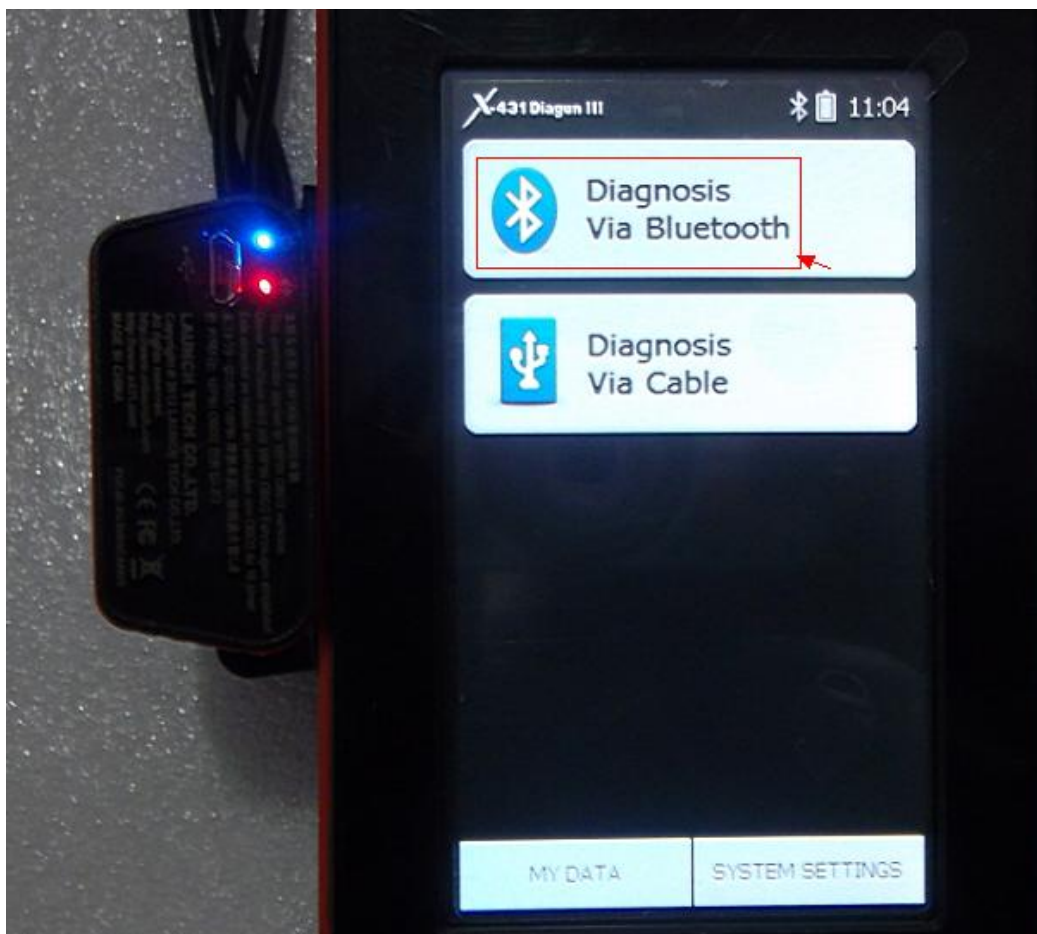


8 选择车辆

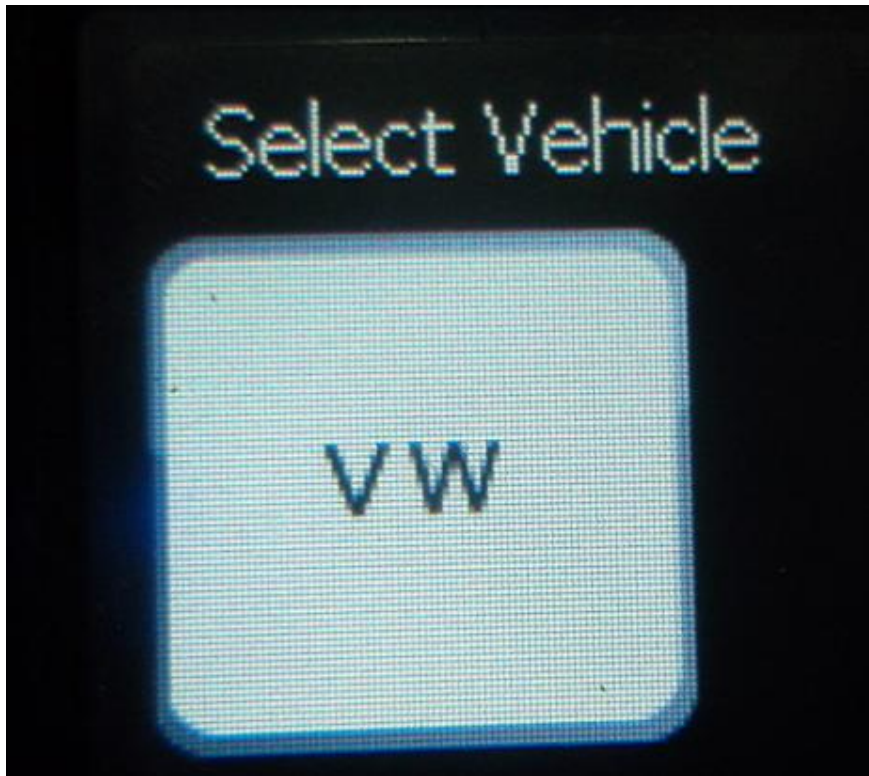

9 选择诊断软件版本

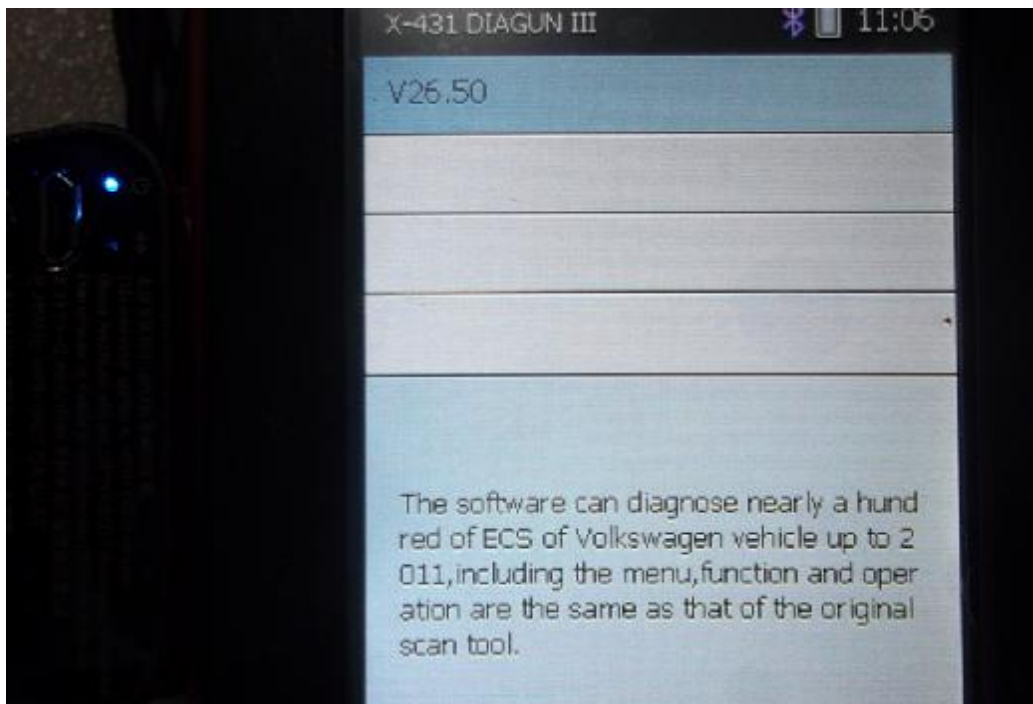

10 进入诊断识别中 识别到设备 sn 号码

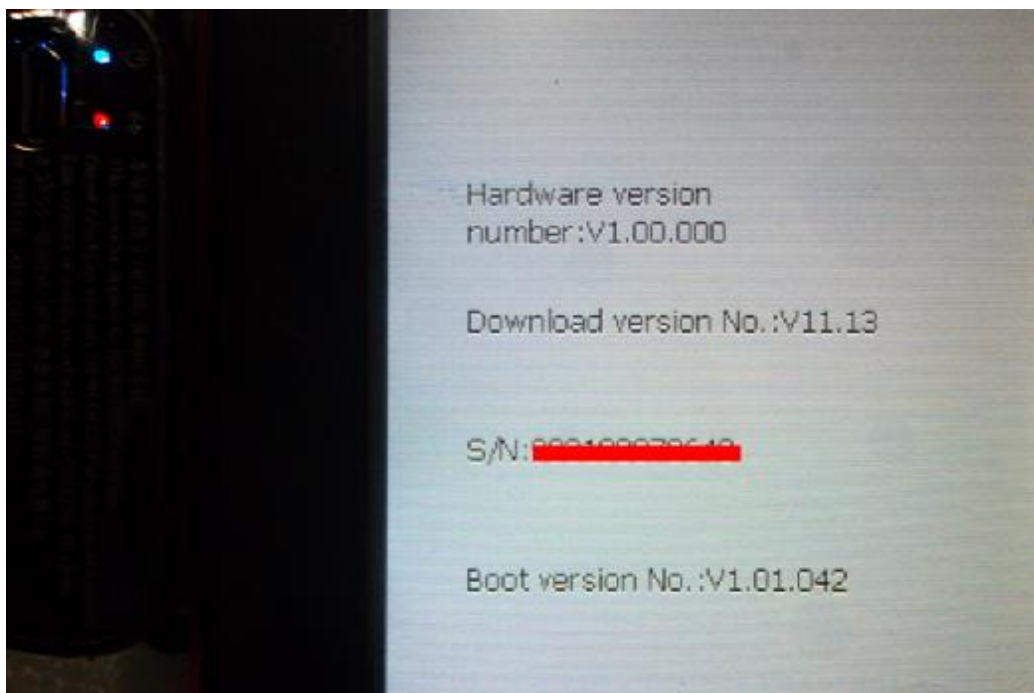

11 诊断结果

Trouble Code	Description	State
16885	P0501 Vehicle speed sensor A:range/performance	
17978	P1570 Engine control module disabled	
16556	P0172 system too rich bank 1	sporadic:
16514	P0130 O2 Sensor circuit,Bank 1-sensor 1:Malfunction	sporadic:
17564	P1156 Manifold absolute pressure (MAP) sensor circuit-G71:open/short to ground	
Prev		More